

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :
H04M 3/50, 3/56

A1

(11) International Publication Number: WO 98/19438

(43) International Publication Date: 7 May 1998 (07.05.98)

(21) International Application Number: PCT/SE97/01772

(22) International Filing Date: 23 October 1997 (23.10.97)

(30) Priority Data:
9603948-2 29 October 1996 (29.10.96) SE

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON
(publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor: GAFFNEY, Kevin; 12, rue Dominique Villars,
F-38000 Grenoble (FR).

(74) Agent: TELEFONAKTIEBOLAGET LM ERICSSON; Patent
and Trademark Dept., S-126 25 Stockholm (SE).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND ARRANGEMENT FOR HANDLING OF MULTIMEDIA MESSAGES IN A TELECOMMUNICATION SYSTEM

(57) Abstract

The present invention relates to methods and an arrangement (100) for receiving, storing and originating multimedia messages. An incoming message is transmitted to an in/out interface via a transport network (300). The message is stored in a message store (130), translated in a translation unit (150) into a format adapted to the presentation capabilities of receiver's (u) current terminal (400) and delivered to the receiver (u) over a user access interface (120) and an access network (200) with guidance from a location database (140). Earlier received messages, which are kept in the message store, can be accessed and edited via any standardised access network thanks to media translation in the translation unit (150). A multimedia message is originated by a user (u) in the system (100) via any access network (200) and the user access interface (120). The message is then stored in the message store (130), translated in the translation unit (150) and delivered to the destination through the in/out interface (110) and an appropriate transport network (300).

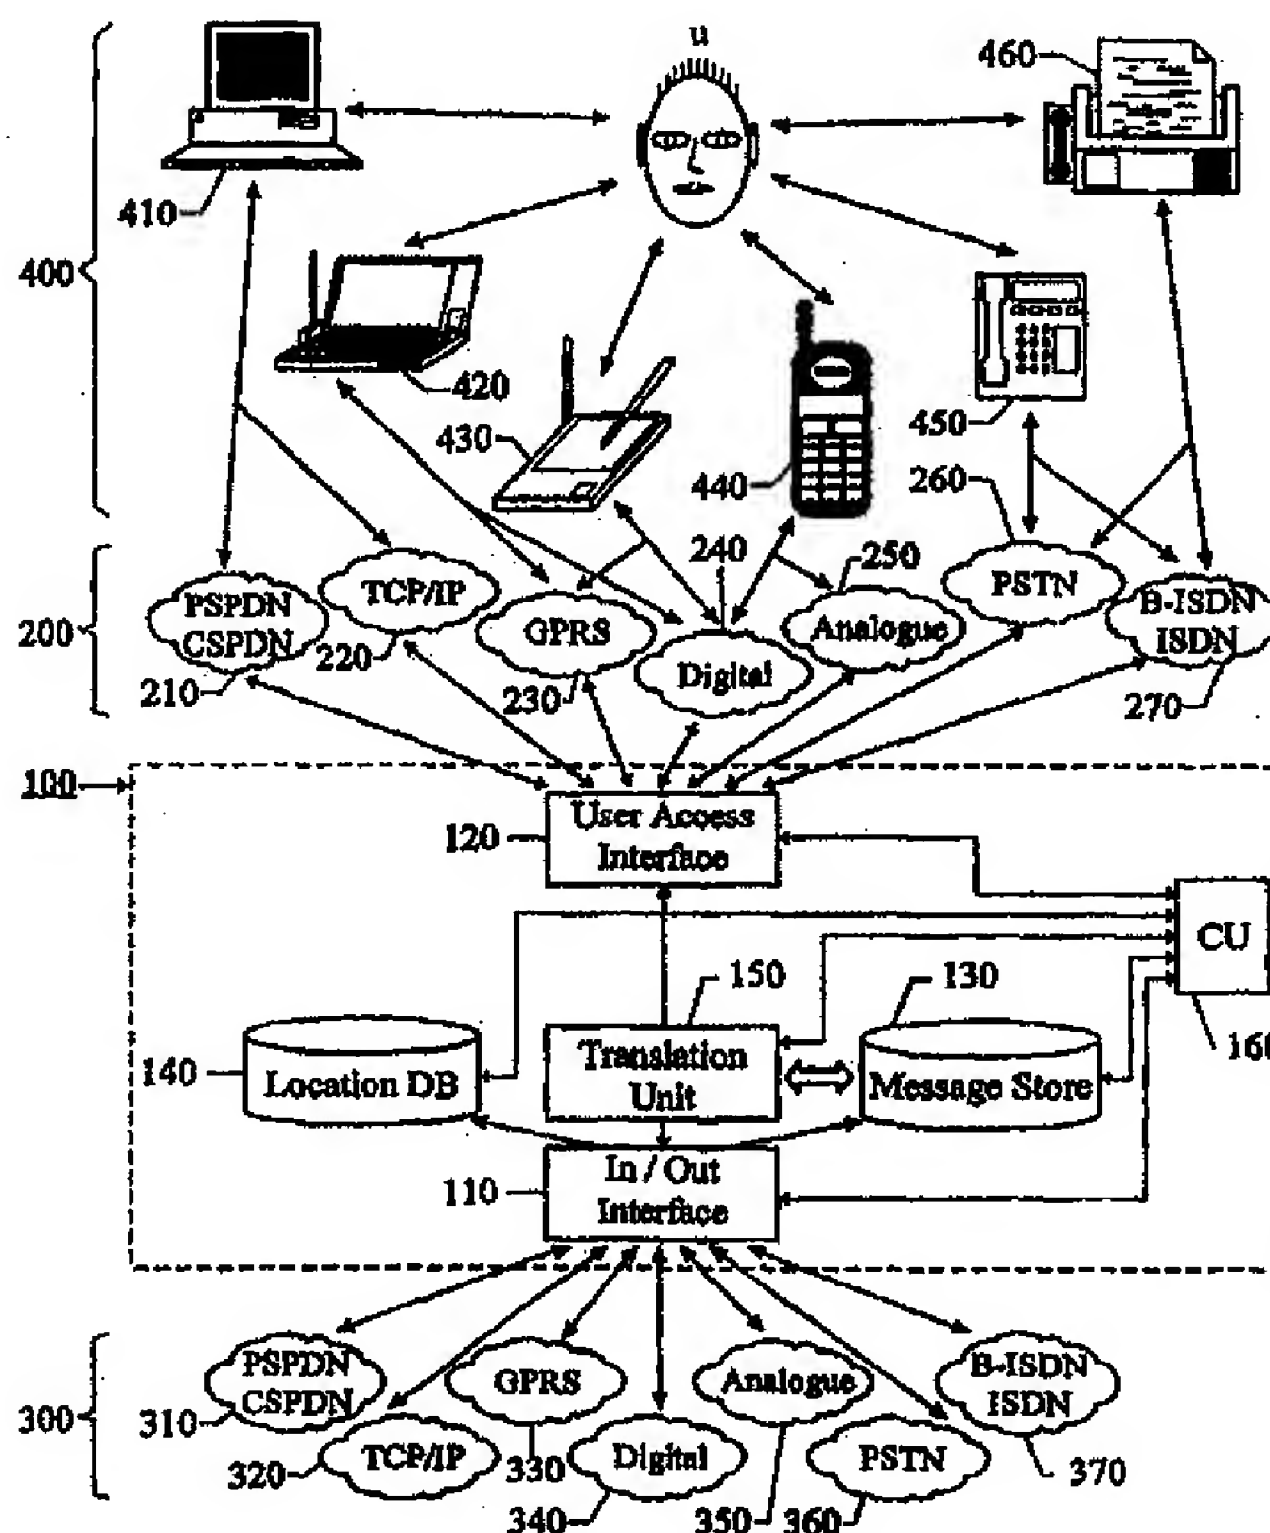

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND ARRANGEMENT FOR HANDLING OF MULTIMEDIA MESSAGES IN A TELECOMMUNICATION SYSTEM**BACKGROUND OF THE INVENTION**

The present invention relates to methods in a communication system which allow messages including multiple message types to be stored and delivered to and from a variety of terminal types
5 over a plurality of interconnecting networks.

The invention also relates to an arrangement for executing said methods.

STATE OF THE ART

10 A communication system is previously known by US-A-4,837,798 in which one single electronic mailbox can receive and store different types of messages, such as voice or data messages. The message recipient has a single point of contact with the system where all messages can be scanned / viewed, which is
15 pre-selected by the recipient. If necessary the communication system performs media translation from one media to another. Furthermore, one individual message may be composed of parts that use different native media.

US-A-5,333,266 discloses a method and an apparatus for
20 integrating mail from a plurality of mail servers handling different media types such as text, voice, facsimile, video and image. Various terminal interfaces, e.g. computers or telephones, can be used to collect, generate and act upon a message of any media type. For this purpose the apparatus
25 comprises translation modules for bi-directional translation between speech and text and between optical character recognition and text.

From EP-A-0,662,763 is known an integrated electronic message system for storage and retrieval of electronic messages of different data types such as voice, video, text or facsimile. Electronic messages directed to a specific destination are placed into a single electronic mailbox, irrespective of the data type of the electronic message. Each message may consist of several message bodies, which contain message parts of different data types. When a stored message is retrieved from a certain endpoint device the format of the message is adapted as much as possible to what kinds of media the specific endpoint device can reproduce. If, for instance, the endpoint device is an ordinary telephone message bodies representing sounds may be presented directly, text bodies containing converted into voice data and message bodies carrying video or image data are eliminated.

In the solution according to US-A-4,837,798 the recipient only has one single point of contact with the communication system. The system is thus incapable of handling e.g. mobile users roaming from one point to another. Incoming messages are always delivered to a default terminal regardless of the user being there or not.

US-A-5,333,266 suggests a distributed message translation system which implies a message translation module in each of the interconnected networks. All message translation modules keep a copy of every message sent. This solution consumes considerable resources that could be used for alternative purposes.

The electronic message transfer system of EP-A-0,662,763 only translates header and title information. Furthermore, messages are always pre-translated, i.e. if the presentation capabilities at the current location of a user demands a message to be

translated before delivery the message will be translated directly and stored centrally in a translated format. Since translation is performed when a message is received and not when a message is actually retrieved some translations may prove to
5 be unnecessary. This is the case, for instance, when a user before accessing a certain message changes his/her terminal to a terminal which can access the message in its original format.

DISCLOSURE OF THE INVENTION

10 An object of the present invention is thus to provide one common message store which may be accessed not only from one, but from multiple terminal and network types.

It is another object of the present invention to link the message store to a user location database, which keeps a record
15 of every user's current or latest registered location.

A further object of the present invention is to minimise the total need for message translation due to limited presentation capabilities of one or more specific user terminals.

Yet a further object of the present invention is to minimise the
20 total need for message translation due to limited transmission capabilities of one or more specific interconnecting telecommunication networks.

These and other objects are met by the present invention according to which the translation is carried out in accordance
25 with terminal type-data stored in the location database. The automatic translation procedure is complemented by a dynamic dialogue between the user and the messaging system. The dynamic dialogue gives the user an opportunity to notify the system of any additional multimedia presentation capabilities that his/her
30 terminal may have and/or to inform the system that his/her terminal cannot handle a particular media format, but another variation of this format and/or to choose an alternative

terminal which he/she may also have access to at his/her current location and which is capable of presenting the multimedia message in preferred format or formats.

5 The messaging system of the present invention sees to it that every multimedia message is delivered to the intended recipient of the message regardless of his/her current location.

Furthermore, the messaging system according to the invention automatically detects the optimal translation of said message into an alternate media, when message translation is necessary.

10 According to a first aspect of the invention, when a multimedia message is addressed to a user in the messaging system, the incoming message is stored in a multimedia message store. A first notification signal for this incoming message is diverted from an address stated in the address field of the message to
15 the messaging system. A second notification signal is then sent from the messaging system to a location given by an address stored. Subsequent to the user being notified of the incoming multimedia message by the second notification signal a connection is established between the user location and the
20 messaging system. This connection is set up by means of the dynamic dialogue described above. All parts of the multimedia message which need and can be translated into another media format in order to be presented at the current user terminal are translated accordingly. The translated parts and the parts of
25 the multimedia message that do not need to be translated are finally transferred to and presented at the user terminal. If limitations in the presentation capabilities of the user terminal make it necessary to exclude one or more parts of a certain multimedia message this fact is preferably indicated to
30 the user along with the presentation of the message. A method

according to this first aspect of the invention is hereby characterised by what is apparent from claim 1.

According to a second aspect of the invention, when a user in the messaging system wishes to review, edit or delete, i.e. act upon, a specific multimedia message which is held in the multimedia message store he/she contacts the messaging system from an arbitrary terminal connected to any telecommunication network. After that the presentation capabilities at the particular user location are established through a dynamic dialogue between the user and the messaging system. Then the multimedia message, translated into a format best possibly suited for the given presentation capabilities, is delivered from the messaging system to the user via the above mentioned network. A method according to this second aspect of the invention is characterised by what is apparent from claim 2.

Naturally, the user is also given an opportunity to perform any modifications of the contents of the multimedia message and store an edited version of the message.

Therefore, according to a third aspect of the invention, a multimedia message is originated by a user in the messaging system according to the following procedure. The user connects to the messaging system from any terminal. The terminal may be connected to any telecommunications network using arbitrary standardised protocols. First, the multimedia message generation capabilities of the terminal are established through a dynamic dialogue between the user and the messaging system. Second, a multimedia message is created by the user and sent to the messaging system. Third, the message is stored in the multimedia message store. Fourth, if the message or parts of the message need and can be translated into a format which is ideally adapted to the message presentation capabilities given by the

transmission network to which the receiver is connected and by the protocol used by the message channel which is delivering the message such a translation is performed on relevant portions of the message. Finally the message or the translated message is transmitted to the receiver. A method according to this third aspect of the invention is hereby characterised by what is apparent from claim 6.

A messaging system for carrying out the above identified aspects of the invention comprises a multimedia message store where a copy of every message sent to or from the system is kept, a translation unit for converting every message sent and received into a message format best possibly suited for the presentation capabilities of the recipient's current terminal, a database which stores address references and terminal data for all users in the system and a control unit for controlling and coordinating the other units in the system. The messaging system according to the invention is hereby characterised by what is apparent from claim 10.

Thus, the proposed solution offers notification to a user when a multimedia message comes in to him/her irrespective of in which network he/she is located in or if he/she has a subscription in this network or not.

A user may also access his/her earlier received multimedia messages from more than one terminal in a multiplicity of network environments.

Furthermore, the invention provides recipients of multimedia messages with as much multimedia information as possible, regardless of the terminal type used. As the term indicates a multimedia message may include more than one message format. The invention presents message parts of a multimedia message to a

recipient according to the following principle. First, presenting the as much data in its original format as possible. Second, translating remaining data into a format adapted to the presentation capabilities of the user terminal. Third, excluding possible remaining data from the message to be presented. Preferably, the recipient is notified of any possible eliminations of one or several parts of a certain multimedia message due to limitations in the presentation capabilities of the recipient's current terminal. Since the recipient always has an opportunity to define and adjust earlier definitions of the presentation capabilities of his/her current terminal in a dynamic dialogue with the system a guarantee is given that every multimedia message is optimally presented to its recipient.

15 DESCRIPTION OF THE FIGURES

- Figure 1 shows the inventive messaging system interconnected with other communication systems;
- Figure 2 illustrates the method according to the invention when a multimedia message is addressed to a user in the suggested messaging system;
- Figure 3 illustrates the method according to the invention when a user in the suggested messaging system acts upon a stored multimedia message;
- Figure 4 illustrates the method according to the invention when a multimedia message is originated from a user in the suggested messaging system.

The invention will now be described in further detail with help from the preferred embodiments and with reference to enclosed drawings.

PREFERRED EMBODIMENTS

In figure 1 is shown a messaging system (100) according to an embodiment of the invention. The system (100) is interconnected with at least one first accessing network (200) and one second transport network (300). A user (u) in the system (100) utilises the accessing network (200) to contact the system (100) via a terminal (400) when he/she wishes to originate a multimedia message or act upon a stored multimedia message. The accessing network (200) is also utilised by the system (100) for delivering multimedia messages to the users (u). The accessing network (200) and the transport network (300) may be any kind of communication network such as e.g. a PSPDN (PSPDN = Packet Switched Public Data Network) (210, 310), a CSPDN (CSPDN = Circuit Switched Public Data Network) (210, 310), a TCP/IP-network (TCP/IP = Transmission Control Protocol / Internet Protocol) (220, 320), a GPRS-network (GPRS = General Packet Radio Service) (230, 330), a digital radio telephone network (240, 340), an analogue radio telephone network (250, 350), a PSTN (PSTN = Public Switched Telephone Network) (260, 360), an ISDN (ISDN = Integrated Services Digital Network) (270, 370) or a B-ISDN (B-ISDN = Broadband ISDN) (270, 370). The terminal (400) can be any kind of terminal with a connection to at least one of the above mentioned accessing networks (200). Hence, the terminal (400) may, for instance, be a desktop computer or a workstation (410), a laptop computer (420) connected to a digital mobile telephone through a PCMCIA card or equipped with a radio modem, a personal digital assistant, personal intelligent communicator or network based knowledgeable assistant (430), a digital or analogue mobile telephone (440), a regular

desk phone, cordless telephone (450) or a facsimile machine (460).

The messaging system (100) comprises an in/out interface (110) which is connected to the transport network(s) (300) and a user
5 access interface (120) connected to the accessing network(s) (200). The system (100) further comprises a multimedia message store (130) where copies of all messages sent to and from the messaging system (100) are held and a user location database (140) in which the network address of every user (u) in the
10 system (100) is registered. A translation unit (150) translates multimedia messages from at least one first media format into at least one second media format if the terminals of the originator and the recipient of a particular multimedia message have different message generation and message presentation
15 capabilities, e.g. due to the fact that they are connected to separate networks that support different protocols. Message translation may also be necessary if the originator and the recipient are connected to the same network but use different terminal types, like e.g. a regular telephone (450) and a
20 facsimile machine (460) both connected to the PSTN (260, 360). A control unit (160) controls and supervises all other units within the messaging system (100).

Figure 2 illustrates the method according to the invention when a multimedia message (M) is addressed (A_0) to a user (u) in the
25 messaging system (100). The multimedia message (M) can be anything from an ordinary telephone call in PSTN to a multimedia mail message including hypertexts, voice messages, pictures and video sequences.

In this example we assume that the user (u) has at least two
30 subscriptions or network identities (A_1, A_2, A_0) in one or several networks and/or network types. Each of these

subscriptions or network identities (A_1, A_2, A_3) are possible primary addresses for a multimedia message (M) to the user (u), since an originator of a message (M) may address it to a destination identified by any of the known subscriptions or network identities (A_1, A_2, A_3) for that user (u).

The user (u) is now at a location (SL_1) which has a first address (A_1). When the user (u) either manually registers the address (A_1) of this location (SL_1) in the messaging system (100) or originates a message from this location (SL_1) via the messaging system (100) a registration message ($R(A_1)$) is sent to the system (100). The registration message ($R(A_1)$) which comprises the user identity (U), current address data (A_1) and if necessary information regarding terminal type and multimedia presentation capabilities is sent via an accessing network (200) to a user access interface (120) in the system (100). The registration message ($R(A_1)$) is then stored in a user location database (140).

When the multimedia message (M) addressed (A_3) to a location (SL_3), where the user (u) has a subscription, comes in an initial notification signal (P_I) is directed to this location (SL_3). However, the notification signal (P_I) is diverted according to a piece of information linked to the user identity (U) indicating that the user (u) is located elsewhere. This information is generated when the user (u) de-registers from a specific location (SL_3) and registers at another location (SL_1). The notification diversion may occur either directly or after a predetermined no-reply time. A signal (U, M) comprising the user identity (U) and the multimedia message (M) is sent via a transport network (300) to an in/out interface (110) in the system (100). The user information (U) is passed on to a control unit (160), which retrieves location data ($LD(A_1)$) for the user

(u) from the location database (140) and the message (M) is stored in a multimedia message store (130). This procedure is controlled by a first control signal (c_1) from the control unit (160) to the multimedia message store (130).

5 The location data ($LD(A_1)$) is utilised by the system (100) when sending a notification signal (P_L) via the user access interface (120) and the accessing network (200) to the user's (u) current location (SL_1). The two addresses (A_0 and A_1) may of course be identical ($A_0 = A_1$) if the user (u) now is located at the
10 address (A_0) associated with the incoming message (M). If the user (u) has de-registered from the system (100) and not registered any new network identity the notification signal (P_L) is instead sent to a pre-defined default address. After the user (u) has replied to the notification signal (P_L) a connection is
15 set up between the current user location (SL_1) and the system (100). This connection enables a dynamic dialogue (D) between the user (u) and the system (100) in which the message presentation capabilities at the user location (SL_1) are established. The multimedia message (M) is not automatically
20 adapted to a message format that suits the user's (u) present terminal type even though this would have been possible. The reason for this is that the user (u) may also have access to an alternative terminal whose address has not been registered in the system (100) or the current user terminal has better
25 presentation capabilities than what appears from the terminal type registered in the location database (140).

The user (u) may e.g. have a combined facsimile/telephone equipment. If this equipment has been registered as a facsimile machine and a voice message comes in the user may not want to
30 have the message translated into text. Instead he/she wants it to be presented via the telephone set. Vice versa; if the

terminal has been registered as a telephone and a fax message comes in the user does probably not want to have the message translated into a voice signal, but would rather have it presented in its original text format. Nevertheless, all
5 multimedia message data that can be directly presented by the user's (u) registered terminal is automatically transferred via the user access interface (120) and the accessing network (200) to the user's current location (SL_1) for presentation.

When the presentation capabilities of the user's (u) terminal
10 have been verified the multimedia message (M) is forwarded to a message translation unit (150) for translation of those parts of the message (M) that need and can be translated into a message format which is intelligible via the user's (u) terminal. The translation instructions are included in a second control signal
15 (c_2) from the control unit (160) to the message translation unit (150). A multimedia message (M') comprising the parts of the original message (M) and/or translated parts of the original message (M) that are to be presented at the user's (u) terminal is then sent to the user access interface (120). Thereafter the
20 message (M') is transferred to the current user location (SL_1) via the accessing network (200) and finally presented to the user (u).

Figure 3 depicts the method according to the invention when a user (u) acts upon a multimedia message (M) which is stored in
25 the multimedia message store (130). Acting upon a multimedia message (M) is understood to be retrieving, editing and storing or deleting a given message (M).

A registration message ($R(A_j)$) updating the user's (u) address and terminal data is sent to the system (100) upon manual
30 registration or after a first message has been originated from a new location (L_j) by the user (u). The registration message

(R(A₃)) is forwarded to the location database (140) via an accessing network (200) and the user access interface (120).

When the user (u) wishes to retrieve a particular multimedia message (M) from the multimedia message store (130) he/she
5 contacts the messaging system (100) via the accessing network (200) and the user access interface (120). A dynamic dialogue (D) between the user (u) and the control unit (160) in the system (100) establishes the presentation capabilities of the current user terminal. The specific message (M) is then
10 retrieved from the multimedia message store (130) by means of a third control signal (c₃) from the control unit (160) to the multimedia message store (130) and sent to the message translation unit (150) for translation. The parts of the message (M) that need and can be translated into a media format which
15 can be intelligibly presented at the user's (u) terminal are translated into such a format and the message parts that can be presented directly are passed through the unit (150) unchanged. The translation instructions are included in said second control signal (c₂) sent from the control unit (160) to the message
20 translation unit (150).

A multimedia message (M') comprising the parts of the original message (M) and/or translated parts of the original message (M) that are to be presented at the user's (u) terminal is sent to the user access interface (120) and transferred to the user
25 location (L₃) via the accessing network (200). The user (u) reviews the message (M') and edits desired parts of it. An edited multimedia message (m') is sent back to the system (100) for storage. The edited message (m') is conveyed to the message translation unit (150) via the accessing network (200) and the
30 user access interface (120). The translation unit (150) translates the multimedia message (m') into its original format

(m), i.e. the format in which the message (M) was stored originally, and passes the message (m) on to the multimedia message store (130). This procedure is effectuated through a fourth control signal (c_4) from the control unit (160) to the message translation unit (150).

The method according to the invention when a multimedia message (M) is originated from a user (u) in the messaging system (100) is illustrated in figure 4.

As stated before, a registration message ($R(A_5)$) updating the user's (u) address and terminal data is sent to the system (100) when the user (u) either manually registers this information or after a first multimedia message has been originated from a new location (L_5) by the user (u). The registration message ($R(A_5)$) is forwarded to the location database (140) via an accessing network (200) and the user access interface (120).

When the user (u) wishes to originate a multimedia message (M) from said location (L_5) via the messaging system (100) he/she contacts the messaging system (100) via the accessing network (200) and the user access interface (120). A dynamic dialogue (D) between the user (u) and the control unit (160) establishes the message generation capabilities of the current user terminal. A multimedia message (M) is then generated in the user terminal and sent along with a destination address (A_x) to the system (100) via the accessing network (200) and the user access interface (120). The message (M) is transferred to the multimedia message store (130) and the destination address (A_x) is passed on to the control unit (160). The control unit (160) compares the message format given by the originating terminal and the message format used in the network to which the destination address (A_x) belongs. If translation of some or all parts of the message (M) is necessary, those parts of the

message that need and can be translated into a message format intelligible by the addressee are translated into such a format in the message translation unit (150). Those parts of the message (M) that do not need translation pass unchanged through
5 the translation unit (150) and any possible other untranslatable parts of the message (M) are not forwarded from the multimedia message store (130) to the translation unit (150). However, if the multimedia message contains such untranslatable parts the recipient is informed of the fact along with the message. A
10 multimedia message (M'), comprising the parts of the original message (M) and/or translated parts of the original message (M), is sent to the in/out interface (110). The receiver address (A_x) is forwarded by the control unit (160) and associated with the message (M') and sees to it that the multimedia message (M') is
15 conveyed through a transport network (300) to the correct destination address (A_x).

The above mentioned methods all reflect different aspects of the same inventive concept regarding the usage of a multimedia message store, a message translation unit and a location
20 database whereby users may receive, originate and act upon multimedia messages regardless of location and telecommunication network.

CLAIMS

1. Method in a telecommunication system for receiving incoming multimedia messages, notifying a specific user (u) in a messaging system (100) that he/she is the recipient of a particular multimedia message (M) and delivering said multimedia message (M) to said user (u), comprising the following steps:

receiving a multimedia message (M) addressed (A_0) to a first location (SL_0),

diverting (U) said multimedia message (M) from said first location (SL_0) to the messaging system (100),

storing said multimedia message (M) in a multimedia message store (130) within said messaging system (100),

c h a r a c t e r i s e d i n

that the method further comprises the following steps:

retrieving from a user location database (140) user location data ($LD(A_1)$) for said user (u) being recipient of said multimedia message (M),

notifying (P_L) the user (u) at a second location (SL_1) of said multimedia message (M) in accordance with said user location data ($LD(A_1)$),

setting up a connection between said second location (SL_1) and said messaging system (100) according a dynamic dialogue (D), in which the message presentation capabilities at the second location (SL_1) are established,

translating some or all parts of said multimedia message (M) into a message format (M'), which is intelligible at the second location (SL_1) if the technological limitations of the message presentation capabilities at the second location (SL_1) so demand, and

presenting at the second location (SL_1) all parts of said multimedia message (M) or translated parts (M') of said

multimedia message (M) that the presentation capabilities at the second location (SL₁) permit.

2. Method in a telecommunication system for acting upon a multimedia message (M) stored in a multimedia message store (130) within a messaging system (100),

5 characterised in that the method comprises the following steps:

setting up a connection between a user location (L₃) and said messaging system (100) according a dynamic dialogue (D), in
10 which the message presentation capabilities at the a location (L₃) are established,

translating some or all parts of said multimedia message (M) into a message format (M'), which is intelligible at the user location (L₃) if the technological limitations of the message
15 presentation capabilities at the user location (L₃) so demand, and

presenting at the location (L₃) all parts of said multimedia message or translated parts (M') of said multimedia message (M) that the presentation capabilities at the location (L₃) permit.

20 3. Method according to claim 2, characterised in that said acting upon multimedia messages involves editing said multimedia message (M) into an edited multimedia message (m).

4. Method according to claim 3, characterised in that said acting upon multimedia messages involves storing said
25 edited multimedia message (m) in said multimedia message store (130).

5. Method according to claim 2, characterised in that said acting upon multimedia messages involves deleting said multimedia message (M) from said multimedia message store (130).

6. Method in a telecommunication system for originating multimedia messages, characterised in that the method comprises the following steps:

5 setting up a connection between a user location (L_5) and a messaging system (100) according a dynamic dialogue (D), in which the message generation capabilities at the user location (L_5) are established,

generating a multimedia message (M) at the location (L_5),
transmitting said multimedia message (M) from the location
10 (L_5) to said messaging system (100),

storing said multimedia message (M) in a multimedia message store (130),

translating some or all parts of said multimedia message (M) into a message format (M'), which is intelligible at a
15 destination location (A_x) for said multimedia message (M) if the technological limitations of the message presentation capabilities at said destination location (A_x) or the transmission capabilities of the connecting network or networks between the system (100) and said destination location (A_x) so
20 demand, and

transmitting said multimedia message (M or M') to the destination location (A_x).

7. Method according to claim 1, 2, 3, 4, 5 or 6,
characterised in that said user location data
25 ($LD(A_1)$, $LD(A_3)$, $LD(A_5)$) for a specific user (u) in said system (100) is entered into a location database (140) when said user (u) originates a multimedia message (M) via the system (100) from a terminal at a given location (SL_1 , L_3 , L_5) identified by said location data ($LD(A_1)$, $LD(A_3)$, $LD(A_5)$) or when said user (u)
30 manually enters location data ($LD(A_1)$, $LD(A_3)$, $LD(A_5)$) into the location database (130).

8. Method according to claim 9, characterised in that location data (LD(A₁), LD(A₃), LD(A₅)) for a specific user (u) is kept in the location database (140) until the information is updated by a new entry of location data (LD(A₁), LD(A₃), LD(A₅)) for said user (u) either upon a new location registration or upon de-registration from the system (100).

9. Method according to claim 8, characterised in that location data representing a default address for the user (u) is entered into the location database (140) if said user (u) de-registers from the system (100).

10. A messaging system (100) for receiving, storing and originating multimedia messages comprising a control unit (160) for controlling and coordinating all other units in said system (100), a multimedia message store (130) in which a copy of each multimedia message received in or sent from the system (100) is held and a message translation unit (150) for translating between different multimedia message formats, characterised in

that said system (100) further comprises a database (140) for storing user location data and which contents are used for notifying a particular user (u) of an incoming multimedia message (M) and for setting up a connection between a particular user (u) and the system (100) via dynamic dialogue (D).

11. Messaging system (100) according to claim 10, characterised in that the system (100) further comprises a user access interface (120) via which users in the system (100) may access the system (100) in order to originate, receive or act upon multimedia messages (M) over an accessing network (200).

12. Messaging system (100) according to claim 11,

c h a r a c t e r i s e d in that said accessing network (200) is a Packet Switched Public Data Network (210), a Circuit Switched Public Data Network (210), a network supporting Transmission Control Protocol / Internet Protocol (220), a
5 General Packet Radio Service network (230), a digital radio telephone network (240), an analogue radio telephone network (250), a Public Switched Telephone Network (260), an Integrated Services Digital Network (270) or a Broadband Integrated Services Digital Network (270).

10 13. Messaging system (100) according to claim 10, 11 or 12, c h a r a c t e r i s e d in that the system (100) further comprises an in/out interface (110) via which multimedia messages (M) are received to and originated from the system (100) over a transport network (300).

15 14. Messaging system (100) according to claim 13, c h a r a c t e r i s e d in that said transport network (300) is a Packet Switched Public Data Network (310), a Circuit Switched Public Data Network (310), a network supporting Transmission Control Protocol / Internet Protocol (320), a
20 General Packet Radio Service network (330), a digital radio telephone network (340), an analogue radio telephone network (250), a Public Switched Telephone Network (360), an Integrated Services Digital Network (370) or a Broadband Integrated Services Digital Network (370).

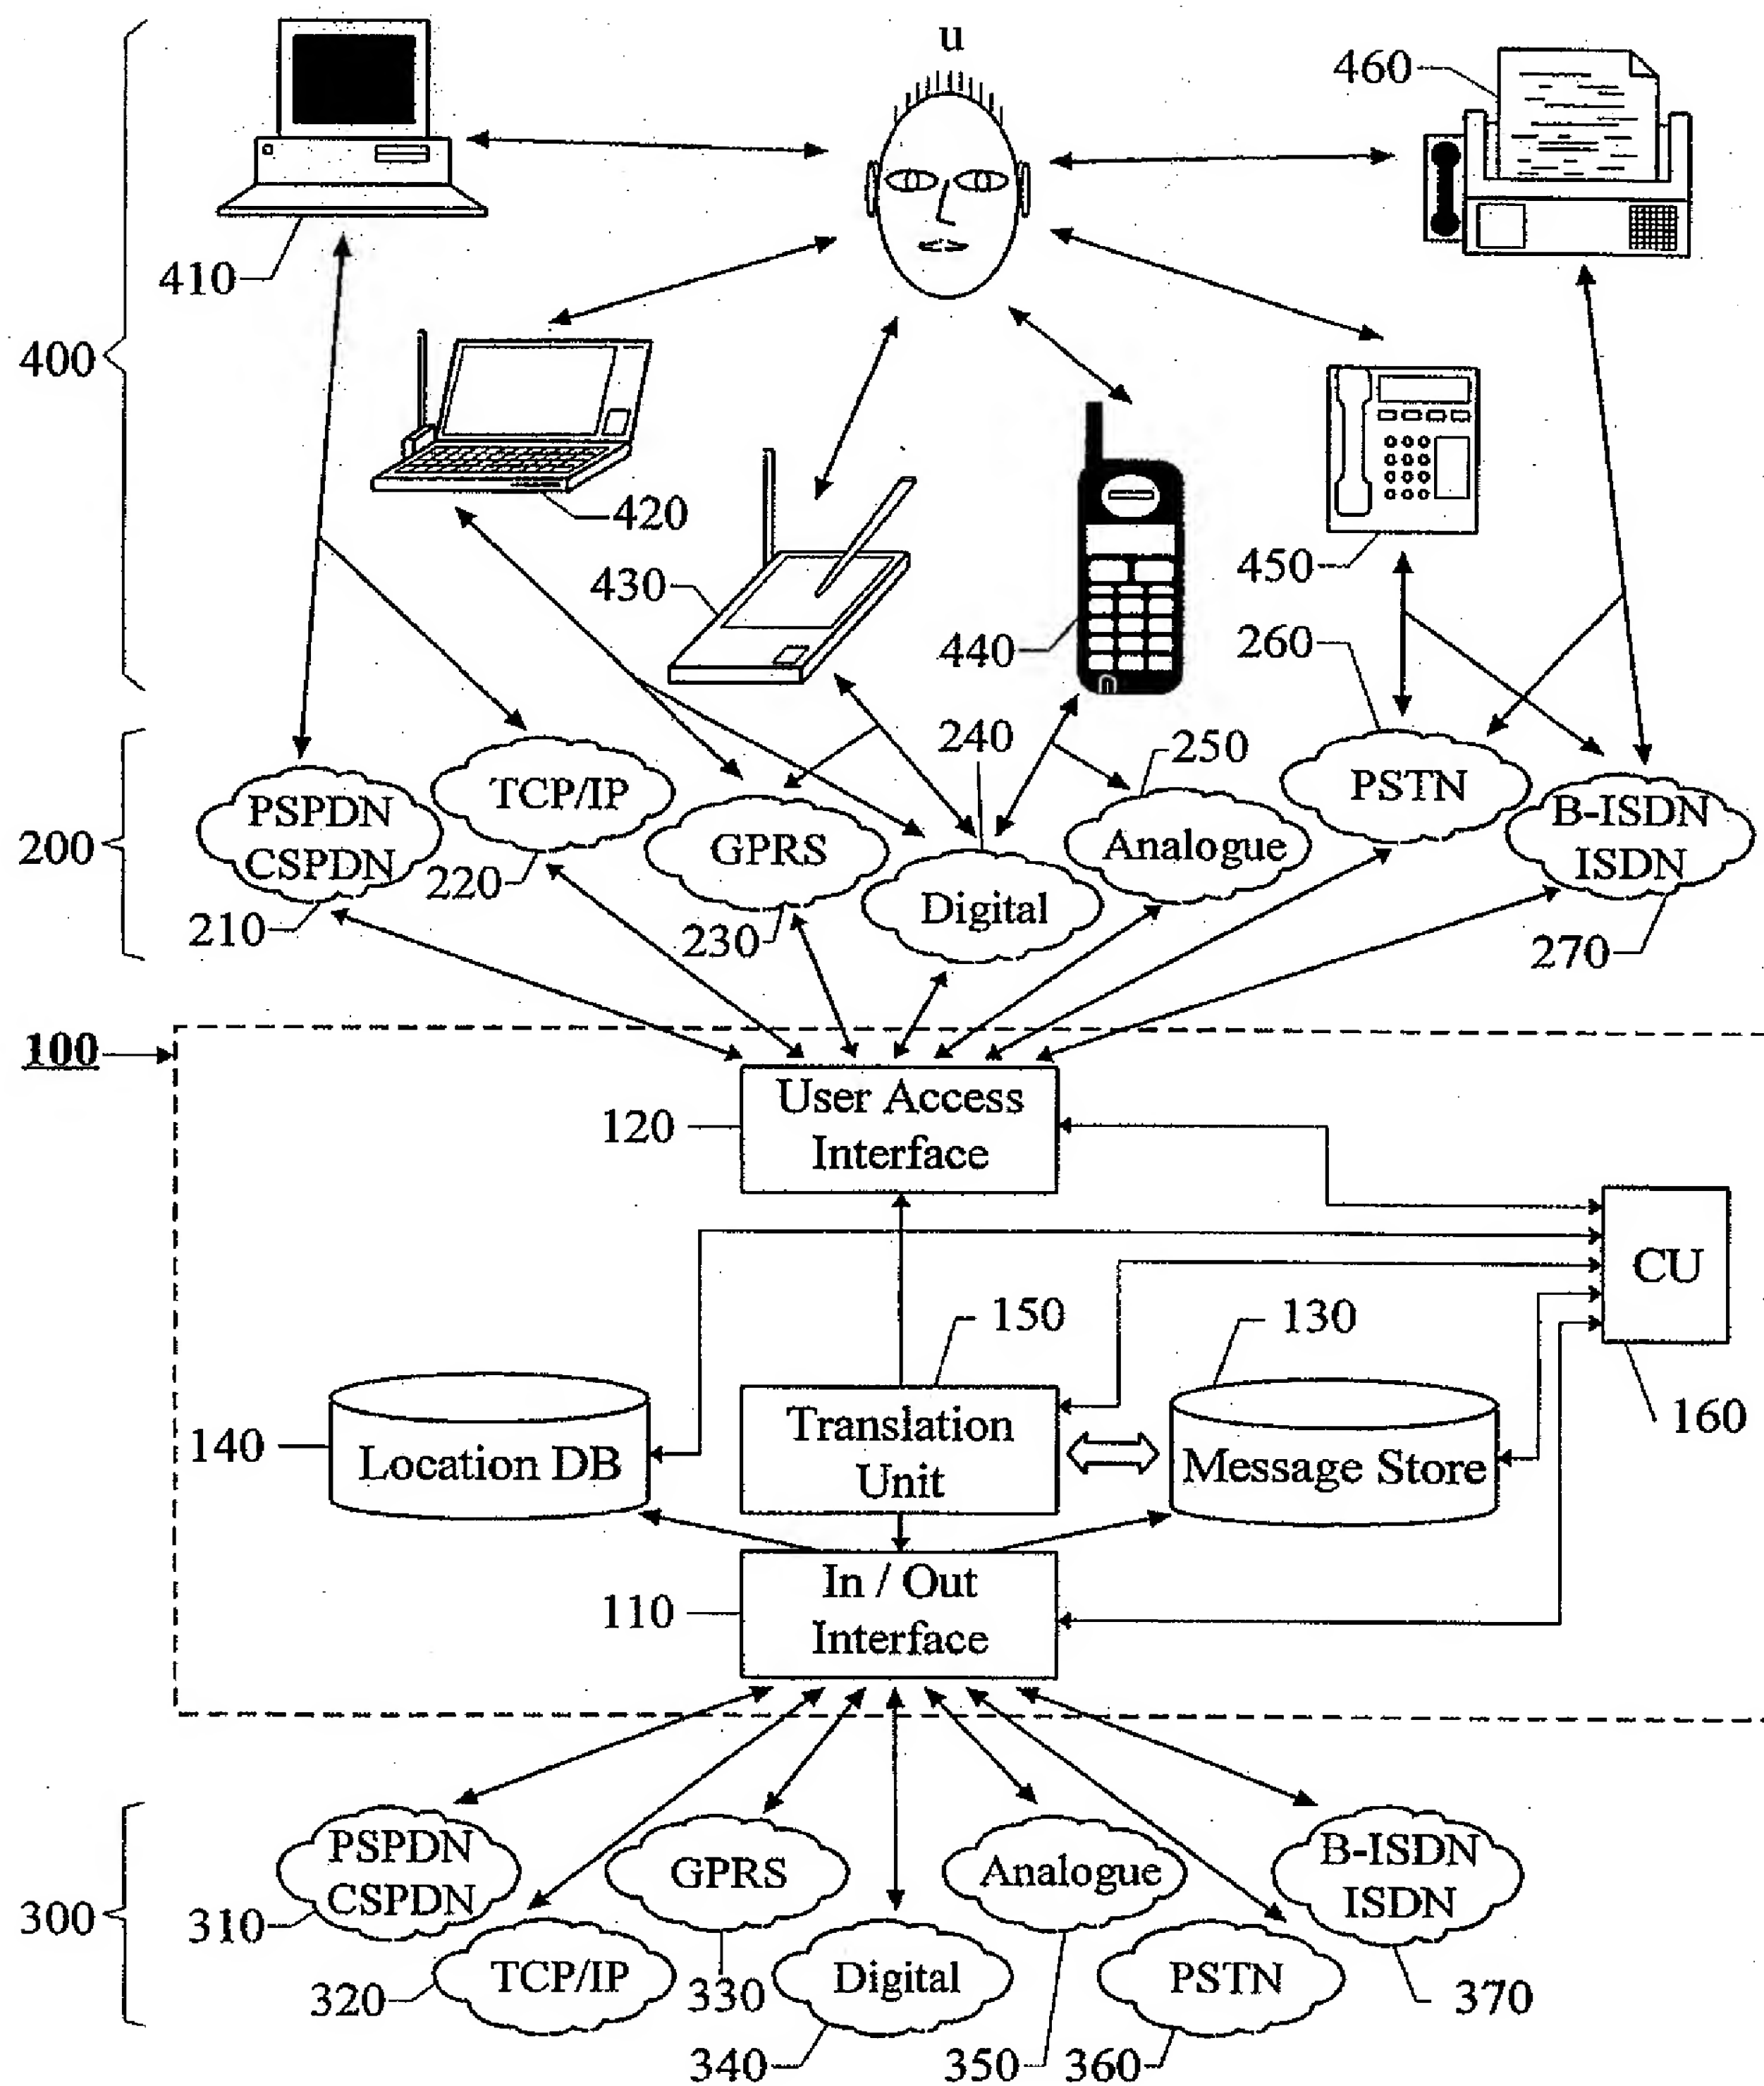


Fig. 1

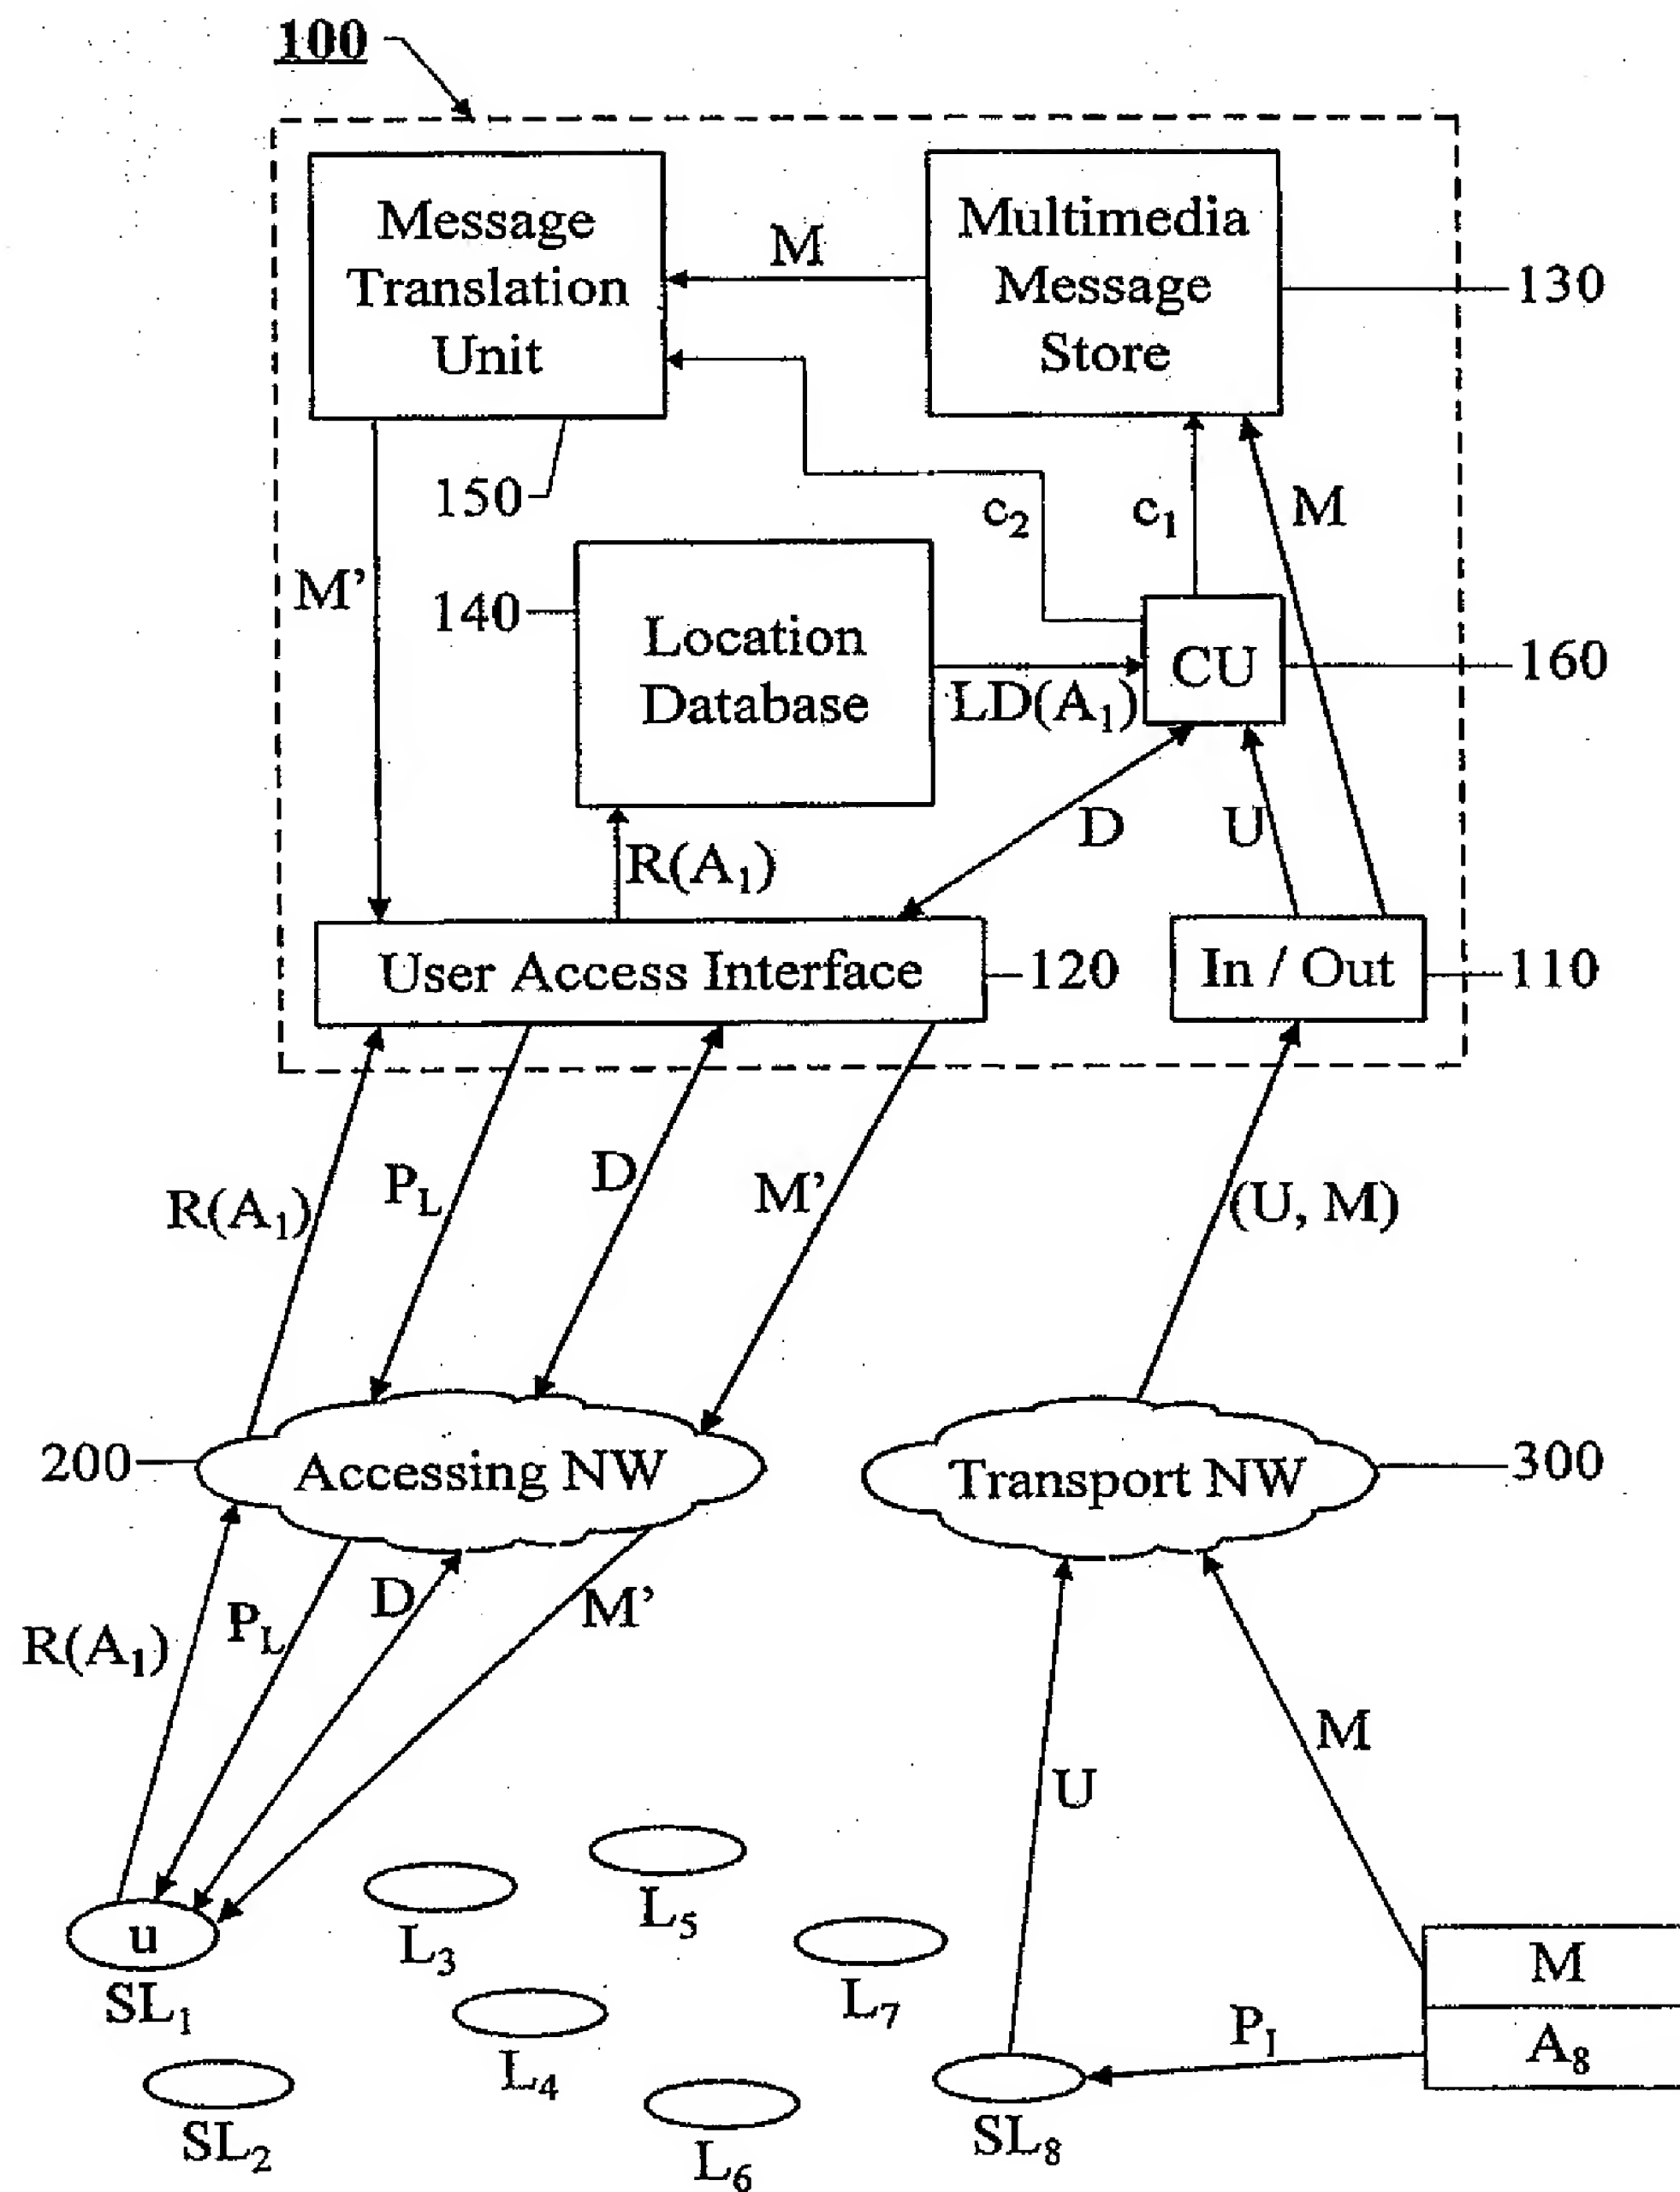


Fig. 2

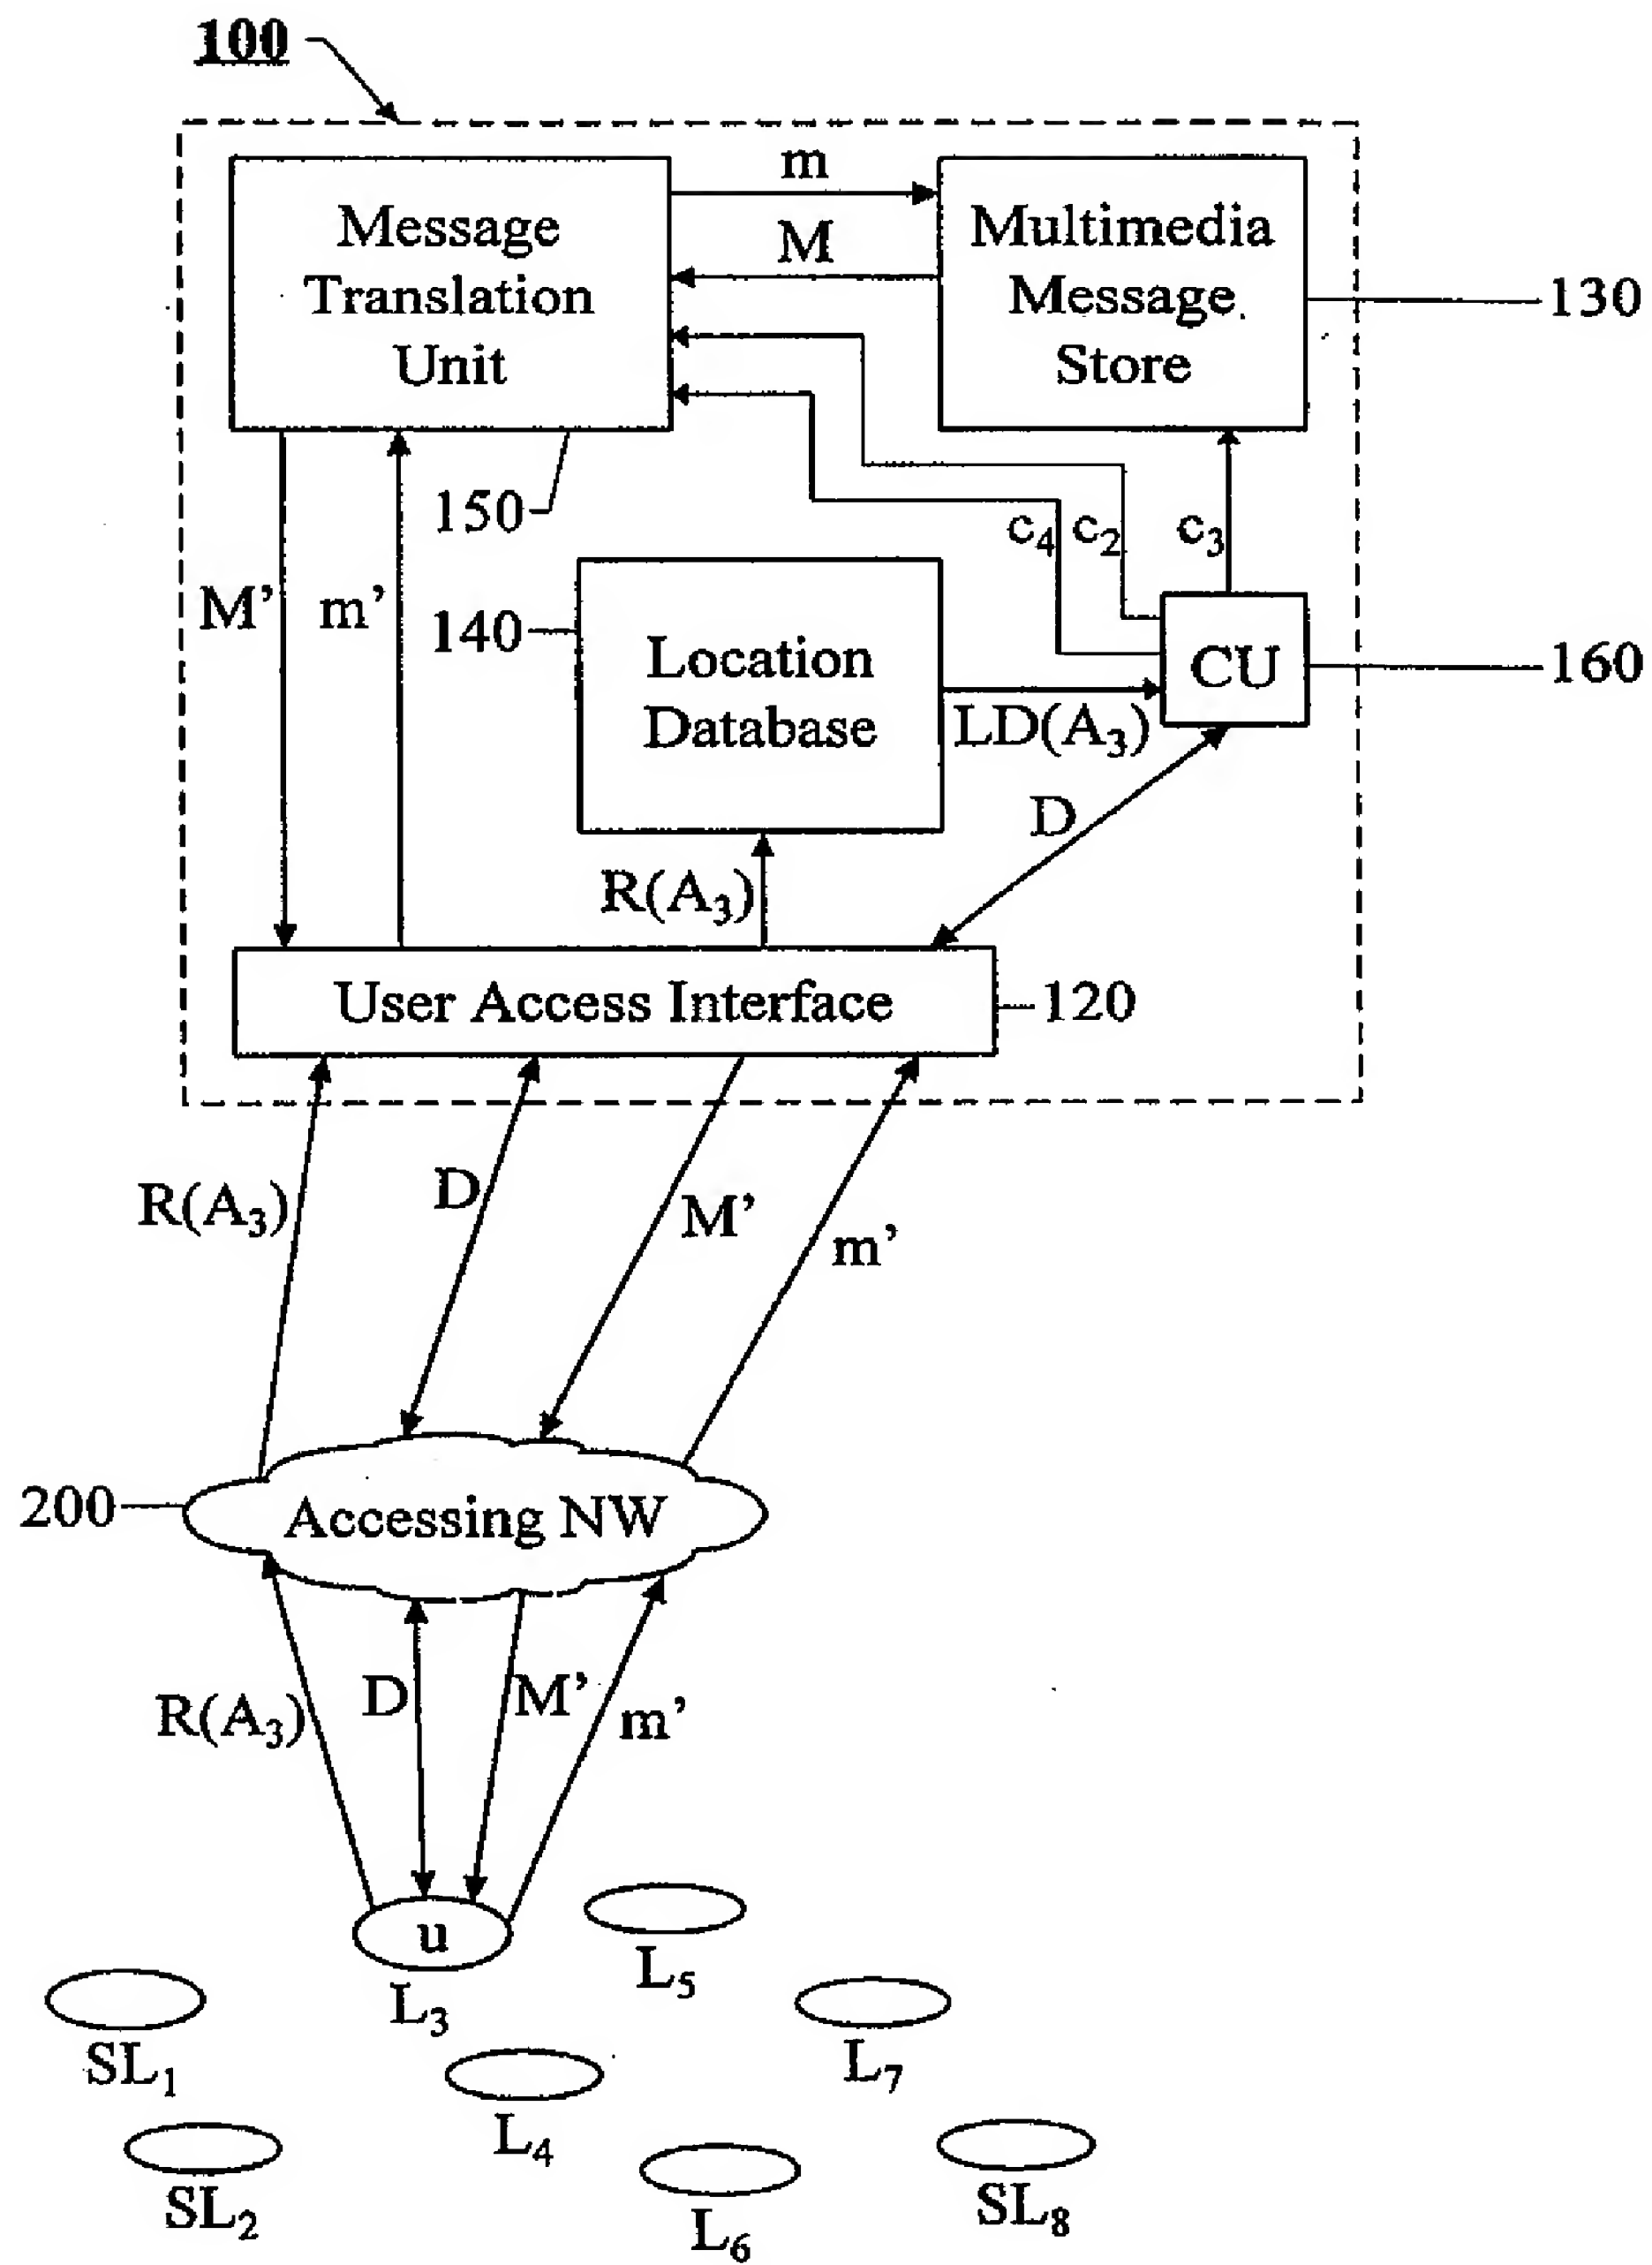


Fig. 3

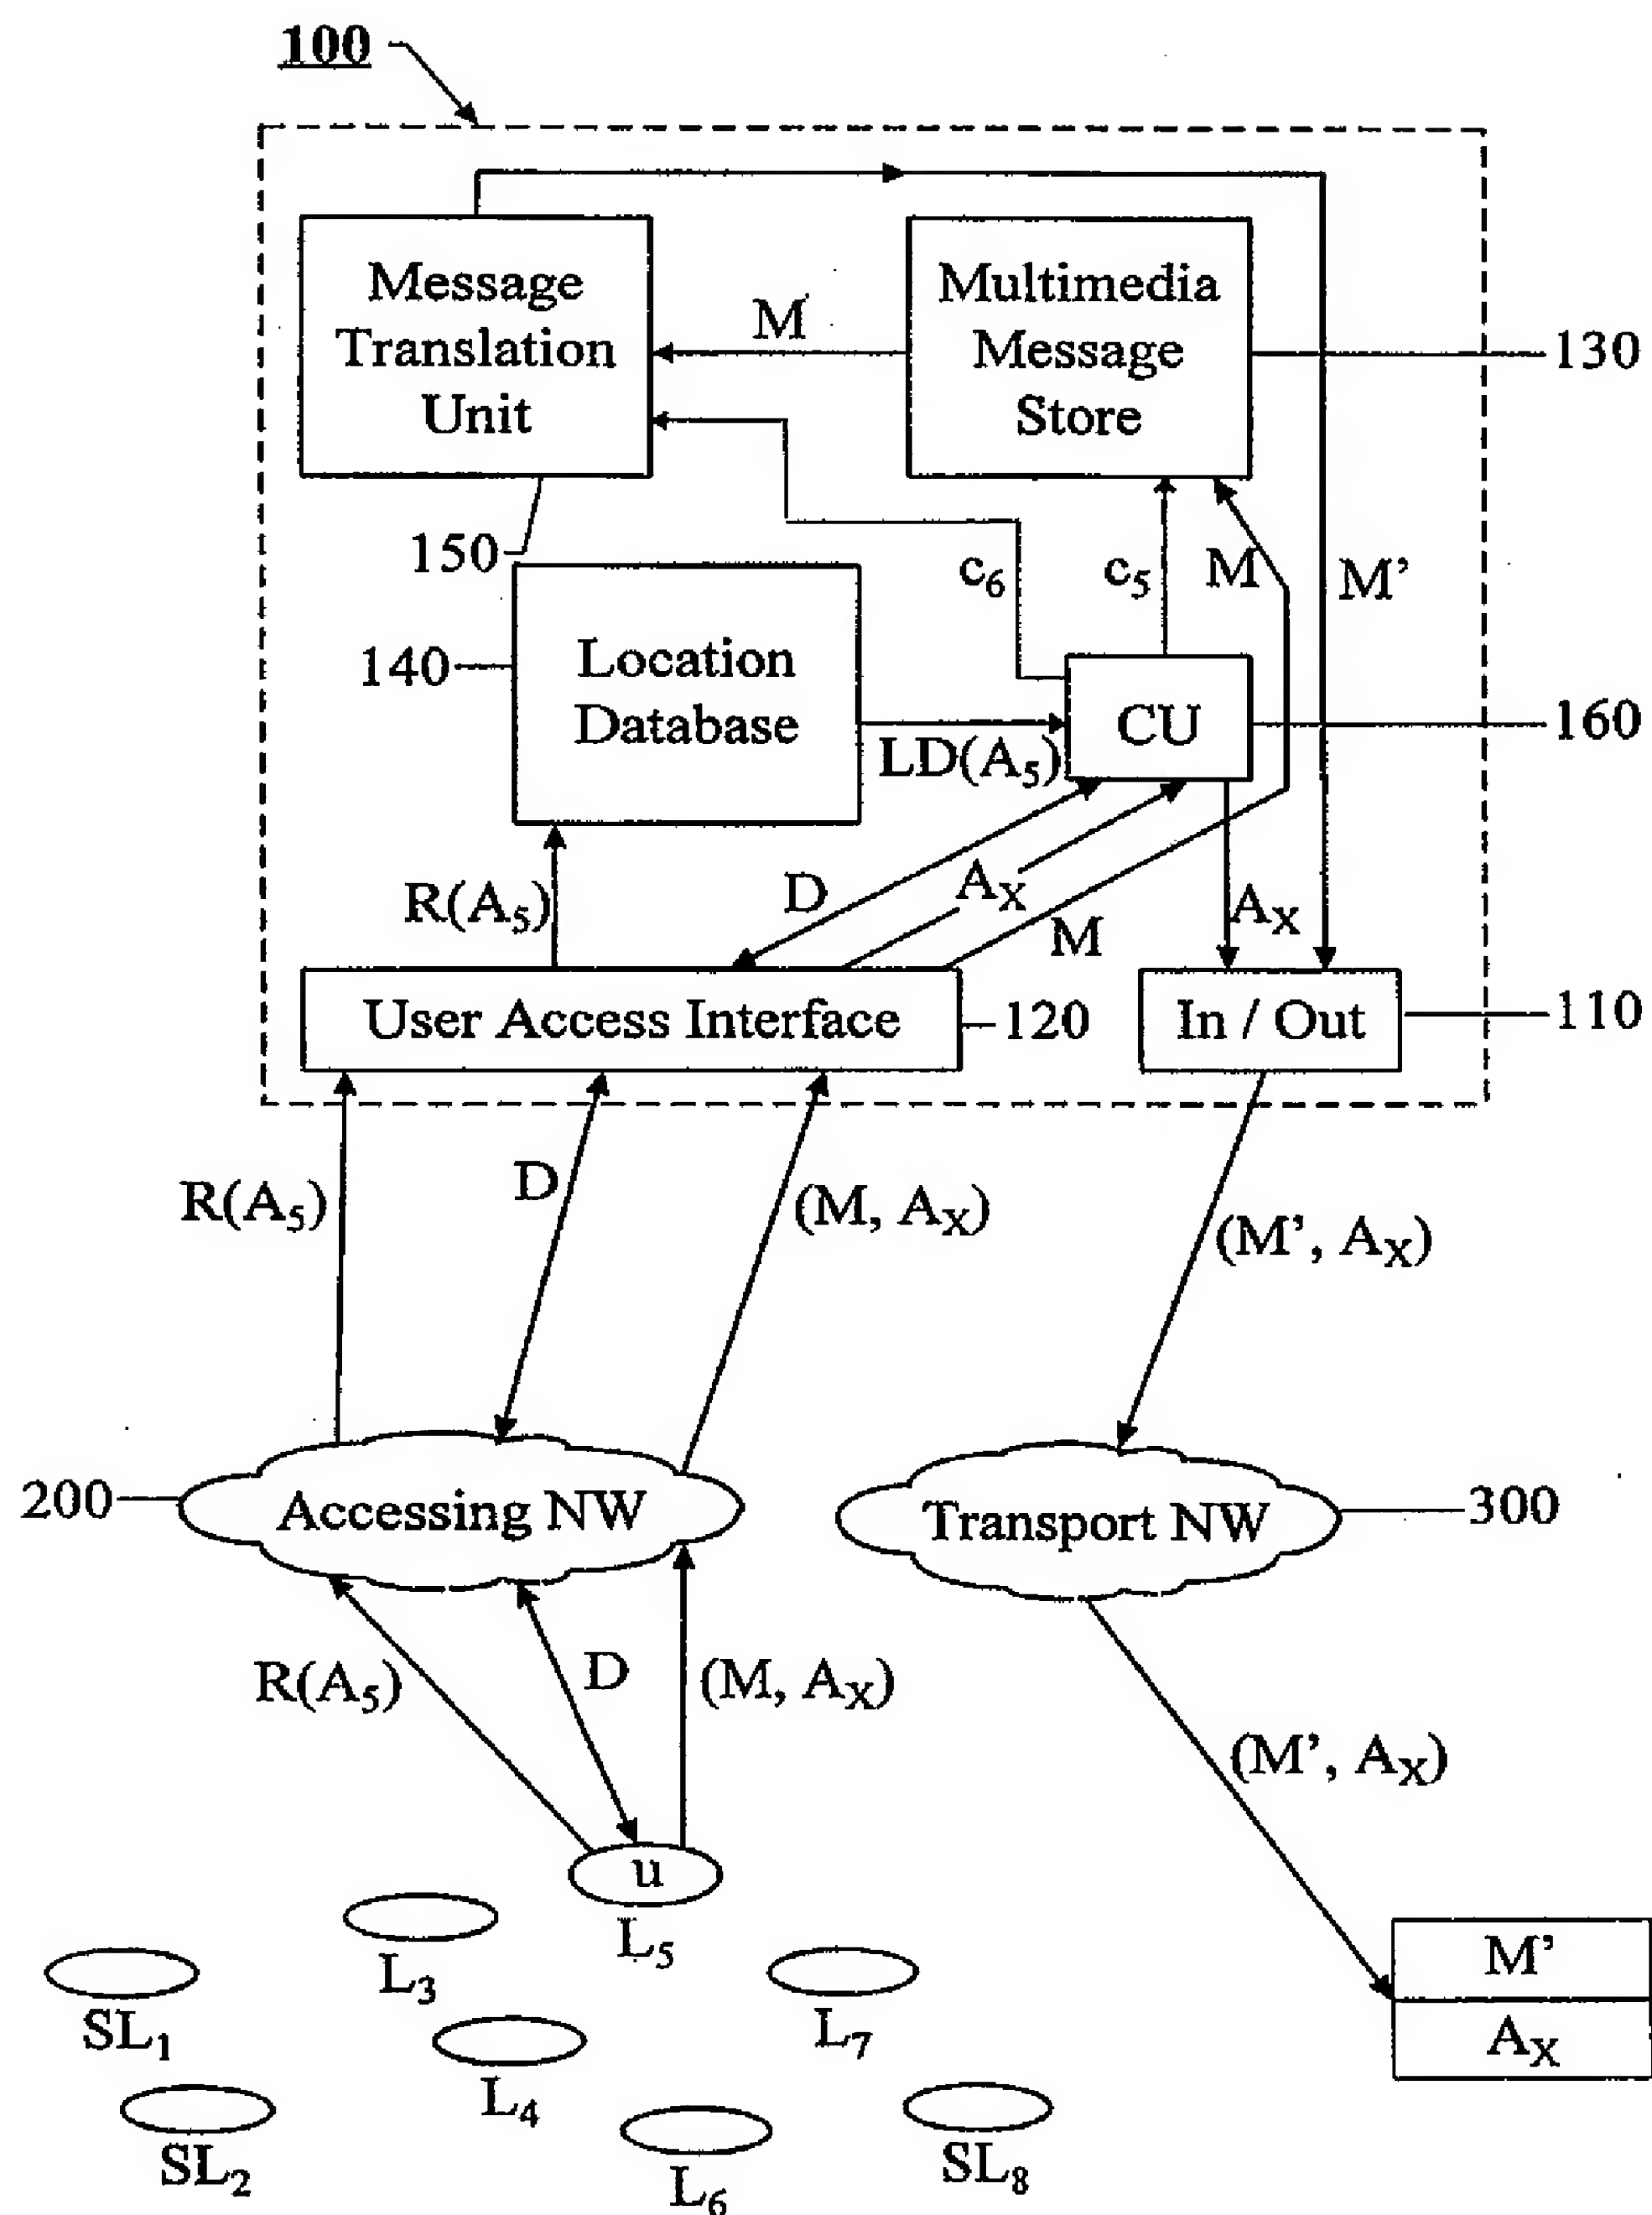


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01772

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04M 3/50, H04M 3/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5497373 A (JOHN S. HULEN ET AL), 5 March 1996 (05.03.96), column 1, line 12 - line 50; column 5, line 15 - line 47, abstract	1-5,7-14
X	--	6
Y	US 5315636 A (RAJENDRA PATEL), 24 May 1994 (24.05.94), abstract	1-5,10-14
Y	EP 0484067 A2 (AMERICAN TELEPHONE AND TELEGRAPH COMPANY), 6 May 1992 (06.05.92), abstract	7-9

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 March 1998

Date of mailing of the international search report

24 -03- 1998

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Friedrich Kühn
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 97/01772

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4837798 A (ROBERTA S. COHEN ET AL), 6 June 1989 (06.06.89), column 2, line 23 - column 3, line 45 --	1-14
A	EP 0662763 A2 (AT&T CORP.), 12 July 1995 (12.07.95), see the whole document ---	1-14
A	WO 9619068 A1 (AT&T CORP.), 20 June 1996 (20.06.96), page 2, line 25 - page 3, line 15 -- -----	1-14

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/03/98

International application No.

PCT/SE 97/01772

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5497373 A	05/03/96	AU 1978495 A WO 9526088 A	09/10/95 28/09/95
US 5315636 A	24/05/94	CA 2069727 A EP 0520194 A JP 5191516 A US 5416780 A	29/12/92 30/12/92 30/07/93 16/05/95
EP 0484067 A2	06/05/92	CA 2050691 A,C JP 4267664 A US 5243645 A	02/05/92 24/09/92 07/09/93
US 4837798 A	06/06/89	CA 1261493 A CA 1270584 B CN 1014666 B EP 0270604 A,B JP 2568602 B JP 63503502 T WO 8707801 A	26/09/89 19/06/90 06/11/91 15/06/88 08/01/97 15/12/88 17/12/87
EP 0662763 A2	12/07/95	AU 8180194 A JP 7221852 A	20/07/95 18/08/95
WO 9619068 A1	20/06/96	AU 4161796 A CA 2177815 A EP 0745299 A JP 9509810 T	03/07/96 17/06/96 04/12/96 30/09/97